


GEARBOX WORKING POSITION

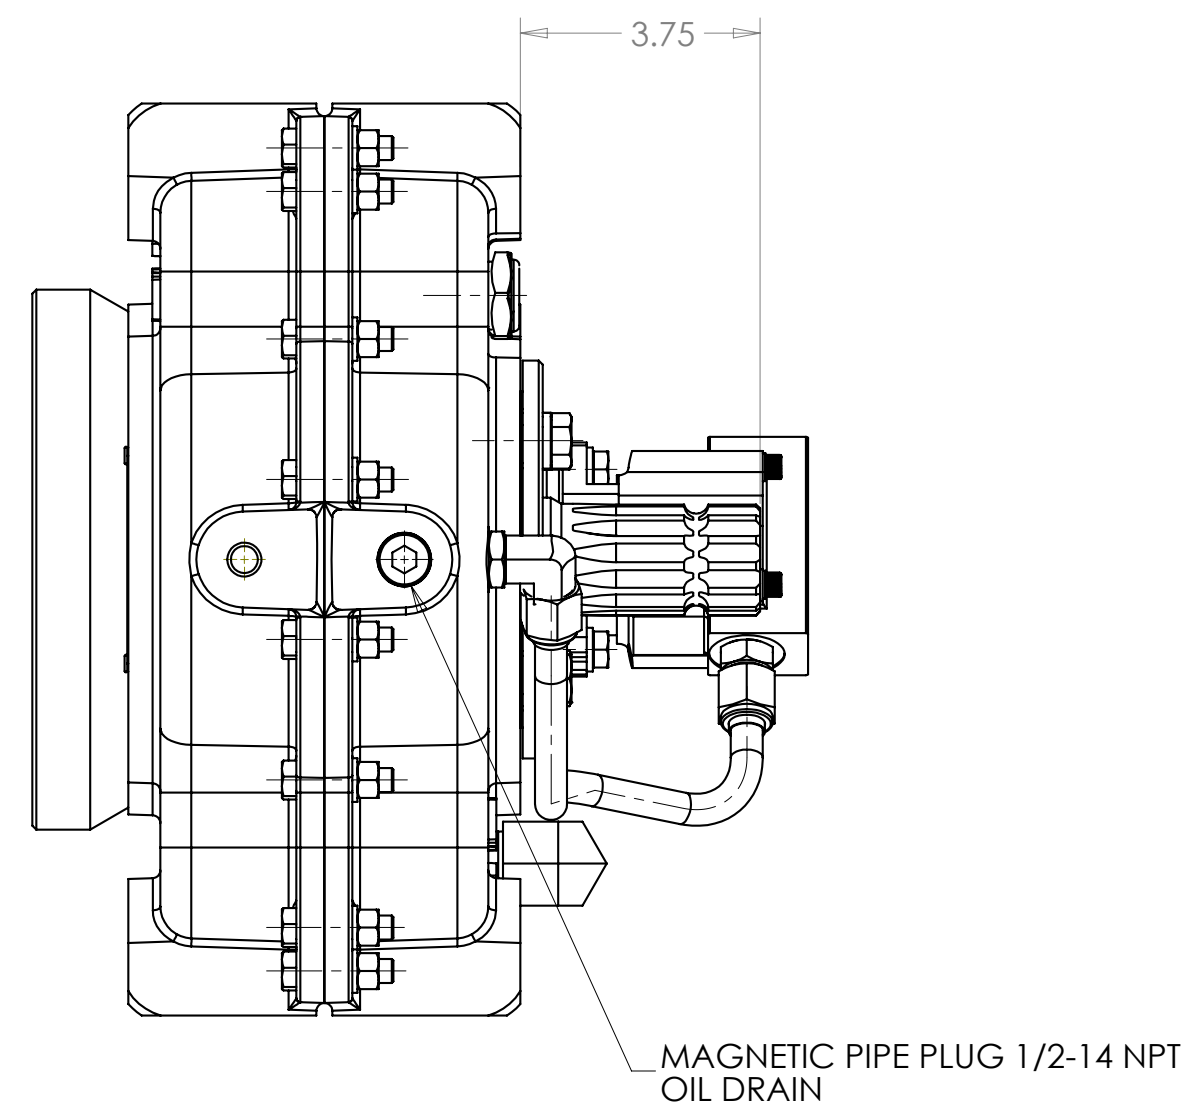

GEARBOX DATA:

- INPUT:
POWER: **150 HP @ 2100 RPM; 135 HP @ 1800 RPM; 120 HP @ 1500 RPM; 90 HP @ 1200 RPM;**
70 HP @ 900 RPM; 50 HP @ 600 RPM.
- SPEED: MAXIMUM **5300** RPM PERMISSIBLE.
- RATIO: **1.02:1** (SPEED REDUCER).
- ROTATION: **ANTI-ENGINE**.
- LUBRICATION TYPE: **COOLED CIRCULATING OIL**. (HEAT EXCHANGER, OIL FILTER, AND CONNECTIONS ARE NOT PART OF THE GEARBOX AND SHALL BE FURNISHED BY CUSTOMER).
- SUMP CAPACITY: APP. **2** QTS.
- SURFACE FINISH: CASE AND COVERS NATURAL ALUMINUM OR PER CUSTOMER REQUEST.
- WEIGHT: APP. **103** lbs W/O OIL.

		RJ Link International, Inc. Rockford, IL 61109, USA		THIRD ANGLE PROJECTION
This document is the property of RJ Link International, Inc. and is loaned to the recipient for his confidential use only in consideration of the loan of this drawing. Recipient promises and agrees that it shall not be used in any way detrimental to the interest of RJ Link International, Inc., that it shall be returned upon request, and it shall not be reproduced, copied, loaned or otherwise disposed of directly or indirectly without the expressed written consent of RJ Link International, Inc.				
TORSIONAL VIBRATIONS EXIST IN ALL ROTATING SYSTEMS. IT IS THE SOLE RESPONSIBILITY OF THE EQUIPMENT MANUFACTURER OR ASSEMBLER TO INSURE THAT NO DAMAGING CRITICALS FALL IN THE OPERATING RANGE OF THE SYSTEM.		DESCRIPTION GEARBOX REDUCER		
DWG SIZE D		DWG No. GR100A10201		
DRAWN MMM	DATE 6/15/2018	SCALE 1:2.5	PART FILE G100	REV SHEET 1 OF 1 00
CHECKED JO	DATE 6/15/2018			
ENG APP JO	DATE 6/15/2018			